



250P



250P Air Spacer

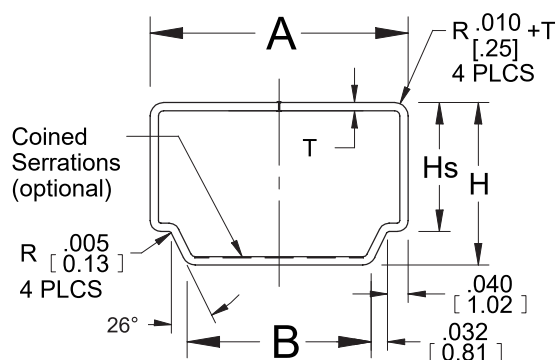

**Zippered
(all sizes)**

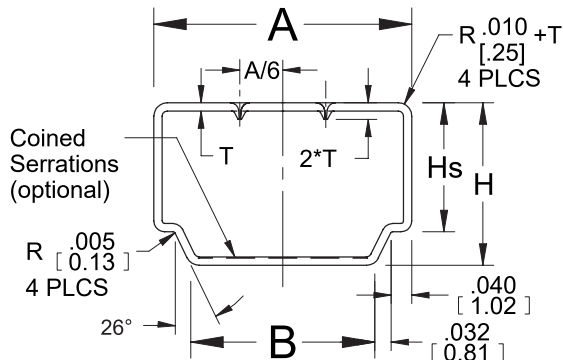


**Perforated
(1/4" [6.5mm] and wider)**

Tolerance: All dimensions .005 [.13 mm] unless otherwise specified.

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20mm] Hi-Q Steel	.302	7.67	.240	6.10	.008	.20
.010" [.25mm] Anodized Aluminum	.305	7.75	.244	6.20	.010	.25
.012" [.30mm] Hi-Q Steel	.307	7.80	.246	6.25	.012	.30
.014" [.36mm] EG Steel	.311	7.90	.248	6.30	.014	.36
.014" [.36mm] Anodized Aluminum	.311	7.90	.248	6.30	.014	.36
.015" [.38mm] Black Steel	.313	7.95	.249	6.32	.015	.38
.016" [.41mm] Anodized Aluminum	.315	8.00	.250	6.35	.016	.41
.016" [.41mm] Mill Finish Aluminum	.315	8.00	.250	6.35	.016	.41
.0185" [.47mm] Mill Finish Aluminum	.320	8.13	.252	6.40	.019	.47

Notes:

1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Available with serrations at no extra charge on inside of **Aluminum** spacer at location indicated above; **not** recommended for spacer to be used for bending.
3. Material tolerances can be found on Material Specifications Data page (ii).
4. Thermal properties can be found on Thermal Performance Data page (iii).




250P

250P Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
3/16	.187	.043
7/32	.219	.075
15/64	.234	.090
1/4	.250	.106
17/64	.266	.126
9/32	.281	.137
19/64	.297	.153
5/16	.313	.169
11/32	.344	.200
23/64	.359	.215
3/8	.375	.231
25/64	.391	.247
13/32	.406	.262
7/16	.438	.294
29/64	.453	.309
15/32	.469	.325
31/64	.484	.340
1/2	.500	.356
33/64	.516	.372
17/32	.531	.387
35/64	.547	.403
9/16	.563	.419
19/32	.594	.450
39/64	.609	.465
5/8	.625	.481
21/32	.656	.512
43/64	.672	.528
11/16	.688	.544
45/64	.703	.559
23/32	.719	.577
3/4	.750	.606
25/32	.781	.637
13/16	.813	.669
27/32	.844	.700
7/8	.875	.731
1	1.000	.856
1 1/16	1.063	.919


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
4.7	.191	.047
5	.197	.053
5.5	.217	.073
6	.236	.092
6.5	.256	.112
7	.276	.132
7.5	.295	.151
8	.315	.171
9	.354	.210
9.5	.374	.230
10	.394	.250
10.5	.413	.279
11	.433	.289
11.5	.453	.309
12	.472	.328
12.5	.492	.348
13	.512	.368
13.2	.520	.376
13.5	.531	.387
14	.551	.407
14.5	.571	.427
15	.591	.447
15.5	.610	.466
16	.630	.486
17	.669	.525
17.5	.689	.545
18	.709	.565
18.5	.728	.584
19	.748	.604
19.5	.768	.624
20	.787	.643
20.5	.807	.663
21	.827	.683
22	.866	.722
23	.906	.762
25.4	1.000	.856




250P




250P Air Spacer Key Availability




A-Trimline Fixed w/ Fin




B-Trimline Ultra-Loc WA




C-Trimline Ultra-Loc BI




D-MP Straight Connector




E-MP Straight Connector PD




F-250P Straight Connector PD



G-MP Flex w/ Hook



H-MP Flex w/ Fin



I-250P Kronenberg Connector