



LPD



LPD Air Spacer

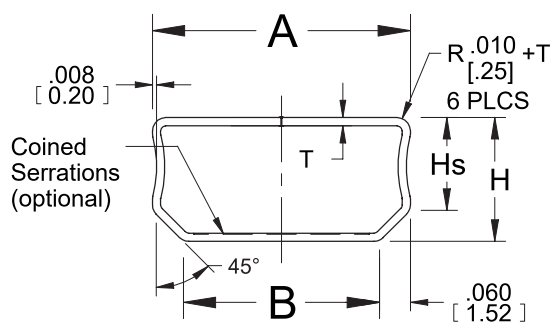

**Zippered
(all sizes)**

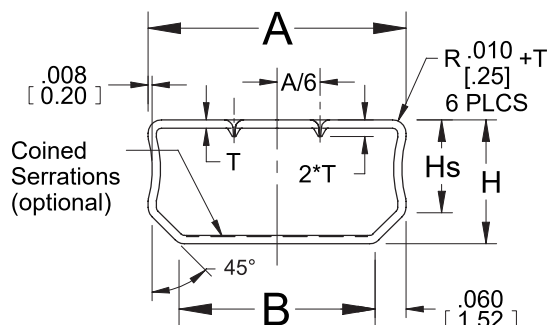


**Perforated
(1/4" [6.5mm] and wider)**

Tolerance: All dimensions .005 [.13 mm] unless otherwise specified.

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20mm] Hi-Q Steel	.224	5.69	.164	4.17	.008	.20
.010" [.25mm] Anodized Aluminum	.228	5.79	.168	4.27	.010	.25
.012" [.30mm] Hi-Q Steel	.232	5.89	.172	4.37	.012	.30
.014" [.36mm] EG Steel	.236	5.99	.176	4.47	.014	.36
.014" [.36mm] Anodized Aluminum	.236	5.99	.176	4.47	.014	.36
.015" [.38mm] Black Steel	.239	6.07	.179	4.55	.015	.38
.016" [.41mm] Anodized Aluminum	.240	6.10	.180	4.57	.016	.41
.016" [.41mm] Mill Finish Aluminum	.240	6.10	.180	4.57	.016	.41
.0185" [.47mm] Anodized Aluminum	.245	6.22	.185	4.70	.0185	.47

Notes:

1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Available with serrations at no extra charge on inside of **Aluminum** spacer at location indicated above; **not** recommended for spacer to be used for bending.
3. Material tolerances can be found on Material Specifications Data page (ii).
4. Thermal properties can be found on Thermal Performance Data page (iii).




LPD

LPD Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
3/16	.188	.068
7/32	.219	.099
1/4	.250	.130
17/64	.266	.146
9/32	.281	.161
5/16	.313	.193
11/32	.344	.224
23/64	.359	.239
3/8	.375	.255
13/32	.406	.286
7/16	.438	.318
29/64	.453	.333
15/32	.469	.349
31/64	.484	.364
1/2	.500	.380
17/32	.531	.411
9/16	.563	.443
19/32	.594	.474
5/8	.625	.505
21/32	.656	.536
11/16	.688	.568
23/32	.719	.599
3/4	.750	.630
25/32	.781	.661
13/16	.813	.693


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
5.5	.217	.097
6	.236	.116
7	.276	.156
7.5	.295	.175
8	.315	.195
9	.354	.234
9.5	.374	.254
10	.394	.274
11	.433	.313
11.5	.453	.333
12	.472	.352
13	.512	.392
13.2	.520	.400
13.5	.531	.411
14	.551	.431
14.5	.571	.451
15	.591	.471
15.5	.610	.490
16	.630	.510
16.5	.650	.530
17	.669	.549
17.5	.689	.569
18.5	.728	.608
19	.748	.628
19.5	.768	.648
20	.787	.667




LPD




LPD Air Spacer Key Availability




A-LPD Fixed




B-LPD Folding




C-LPD WA




D-LPD BI




E-LPD Flex

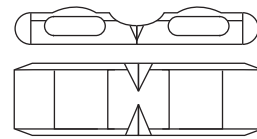


F-LPD Straight Connector

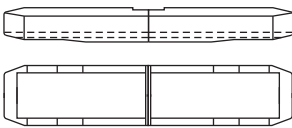

G-LPD Straight Connector PD



H-LPD Kronenberg Connector




LPD

LPD Air Spacer

Aluminum: Clear Anodized, Color In™ Anodized & Mill Finish

Air Spacer Width Fractional	Pieces Per Shipping Carton		Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths	Cut To Length		A	B	C	D	E	F	G	H
3/16	500	1500	6333	■	■	■	■	■	■	■	■
7/32	500	1400	6333	■	■	■	■	■		■	■
1/4	400	1300	5067	■	■	■	■	■		■	■
17/64	375	1150	4750	■	■	■	■	■		■	
9/32	375	1150	4750	■	■	■	■	■	■	■	■
5/16	350	1000	4433	■	■	■	■	■	■	■	■
11/32	300	950	3800	■	■	■	■	■	■	■	■
23/64	300	900	3800	■	■	■	■	■		■	
3/8	275	850	3483	■	■	■	■	■	■	■	■
13/32	275	800	3483	■	■	■	■	■	■	■	■
7/16	250	750	3167	■	■	■	■	■	■	■	■
15/32	225	675	2850	■	■	■	■	■	■	■	■
1/2	225	650	2850	■	■	■	■	■	■	■	■
17/32	200	550	2533	■	■	■	■	■	■	■	■
9/16	200	550	2533	■	■	■	■	■	■	■	■
19/32	175	500	2217	■	■	■	■	■		■	■
5/8	175	500	2217	■	■	■	■	■	■	■	■
21/32	160	450	2027	■	■	■	■	■		■	■
11/16	150	TBA	1900	■	■	■	■	■		■	■
23/32	145	400	1837	■	■	■	■	■		■	■
3/4	140	400	1773	■	■	■	■	■		■	■
25/32	130	375	1647	■	■	■	■	■		■	
13/16	125	375	1583	■	■	■	■	■			

Available with pre-inserted connectors for bending equipment on request.



LPD




LPD Air Spacer

Aluminum: Clear Anodized, Color In™ Anodized & Mill Finish

Air Spacer Width Millimeter	Pieces Per Shipping Carton		Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths	Cut To Length		A	B	C	D	E	F	G	H
5.5	450	1350	5700	■	■	■	■	■		■	■
6	400	1300	5067	■	■	■	■	■		■	
7	375	1150	4750	■	■	■	■	■	■		■
7.5	350	1100	4433	■	■	■	■	■		■	■
8	350	1000	4433	■	■	■	■	■	■	■	■
9	300	900	3800	■	■	■	■	■		■	■
9.5	275	825	3483	■	■	■	■	■	■	■	■
10	275	825	3483	■	■	■	■	■		■	■
11	250	750	3167	■	■	■	■	■	■	■	■
11.5	225	675	2850	■	■	■	■	■		■	■
12	225	675	2850	■	■	■	■	■	■	■	■
13	215	625	2724	■	■	■	■	■		■	■
13.5	200	500	2533	■	■	■	■	■	■	■	
14	200	500	2533	■	■	■	■	■		■	■
14.5	200	500	2533	■	■	■	■	■	■	■	■
15	175	500	2217	■	■	■	■	■		■	■
15.5	175	500	2217	■	■	■	■	■		■	■
16	175	500	2217	■	■	■	■	■	■	■	■
17	150	450	1900	■	■	■	■	■			■
18.5	145	425	1837	■	■	■	■	■		■	■
19	125	400	1583	■	■	■	■	■		■	■
19.5	125	TBA	1583	■	■	■	■	■			
20	125	350	1583	■	■	■	■	■		■	

Available with pre-inserted connectors for bending equipment on request.



LPD

LPD Air Spacer

Steel: Electro Galvanized and Black

Air Spacer Width Fractional	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability						
	12'8" Lengths		A	B	C	D	E	F	G
3/16	250	3167	■	■	■	■	■	■	■
7/32	250	3167	■	■	■	■	■		■
1/4	200	2533	■	■	■	■	■		■
17/64	190	2407	■	■	■	■	■		■
9/32	190	2407	■	■	■	■	■	■	■
5/16	175	2217	■	■	■	■	■	■	■
11/32	150	1900	■	■	■	■	■	■	■
23/64	150	1900	■	■	■	■	■		■
3/8	140	1773	■	■	■	■	■	■	■
13/32	140	1773	■	■	■	■	■	■	■
7/16	125	1583	■	■	■	■	■	■	■
15/32	120	1520	■	■	■	■	■	■	■
1/2	120	1520	■	■	■	■	■	■	■
17/32	100	1267	■	■	■	■	■	■	■
9/16	100	1267	■	■	■	■	■	■	■
19/32	90	1140	■	■	■	■	■		■
5/8	90	1140	■	■	■	■	■	■	■
21/32	80	1013	■	■	■	■	■		■
11/16	75	950	■	■	■	■	■		■
23/32	75	950	■	■	■	■	■		■
3/4	70	887	■	■	■	■	■		■
25/32	65	823	■	■	■	■	■		■
13/16	60	760	■	■	■	■	■		■

Available with pre-inserted connectors for bending equipment on request.