


LPD-SS

 ALLMETAL®

LPD .008 Stainless Steel Air Spacer

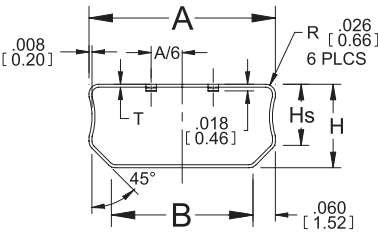


Perforated
(1/4" [6.5mm] and wider)

Tolerance: All dimensions $\pm .005$ [.13mm] unless otherwise specified

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20 mm] Stainless Steel	.224	5.69	.164	4.17	.008	.20

Notes:

1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Material tolerances can be found on Material Specifications Data page (ii).
3. Thermal properties can be found on Thermal Performance Data page (iii).
4. Perforations Only. No Serration.




LPD-SS

LPD .008 Stainless Steel Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
3/16	.188	.068
7/32	.219	.099
1/4	.250	.130
17/64	.266	.146
9/32	.281	.161
5/16	.313	.193
11/32	.344	.224
23/64	.359	.239
3/8	.375	.255
13/32	.406	.286
7/16	.438	.318
29/64	.453	.333
15/32	.469	.349
31/64	.484	.364
1/2	.500	.380
17/32	.531	.411
9/16	.563	.443
19/32	.594	.474
5/8	.625	.505
21/32	.656	.536
11/16	.688	.568
23/32	.719	.599
3/4	.750	.630
25/32	.781	.661
13/16	.813	.693


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
5.5	.217	.097
6	.236	.116
7	.276	.156
7.5	.295	.175
8	.315	.195
9	.354	.234
9.5	.374	.254
10	.394	.274
11	.433	.313
11.5	.453	.333
12	.472	.352
13	.512	.392
13.2	.520	.400
13.5	.531	.411
14	.551	.431
14.5	.571	.451
15	.591	.471
15.5	.610	.490
16	.630	.510
16.5	.650	.530
17	.669	.549
17.5	.689	.569
18.5	.728	.608
19	.748	.628
19.5	.768	.648
20	.787	.667




LPD-SS




LPD .008 Stainless Steel Air Spacer Key Availability




A-LPD Fixed




B-LPD Folding




C-LPD WA




D-LPD BI




E-LPD Flex



F-LPD Straight Connector



G-LPD Straight Connector PD




H-LPD Kronenberg Connector



LPD Air Spacer
.008 Stainless Steel

Air Spacer Width Fractional	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths		A	B	C	D	E	F	G	H
3/16	500	6333	■	■	■	■	■	■	■	■
7/32	500	6333	■	■	■	■	■	■	■	■
1/4	400	5067	■	■	■	■	■	■	■	■
17/64	375	4750	■	■	■	■	■	■	■	■
9/32	375	4750	■	■	■	■	■	■	■	■
5/16	350	4433	■	■	■	■	■	■	■	■
11/32	300	3800	■	■	■	■	■	■	■	■
23/64	300	3800	■	■	■	■	■	■	■	■
3/8	275	3483	■	■	■	■	■	■	■	■
13/32	275	3483	■	■	■	■	■	■	■	■
7/16	250	3167	■	■	■	■	■	■	■	■
15/32	225	2850	■	■	■	■	■	■	■	■
1/2	225	2850	■	■	■	■	■	■	■	■
17/32	200	2533	■	■	■	■	■	■	■	■
9/16	200	2533	■	■	■	■	■	■	■	■
19/32	175	2217	■	■	■	■	■	■	■	■
5/8	175	2217	■	■	■	■	■	■	■	■
21/32	160	2027	■	■	■	■	■	■	■	■
11/16	150	1900	■	■	■	■	■	■	■	■
23/32	145	1837	■	■	■	■	■	■	■	■
3/4	140	1773	■	■	■	■	■	■	■	■
25/32	130	1647	■	■	■	■	■	■	■	■
13/16	125	1583	■	■	■	■	■	■	■	■

Available with pre-inserted connectors for bending equipment on request.



LPD-SS



LPD Air Spacer
.008 Stainless Steel

Air Spacer Width Millimeter	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths		A	B	C	D	E	F	G	H
5.5	450	5700	■	■	■	■	■		■	■
6	400	5067	■	■	■	■	■		■	
7	375	4750	■	■	■	■	■	■	■	■
7.5	350	4433	■	■	■	■	■		■	■
8	350	4433	■	■	■	■	■	■	■	■
9	300	3800	■	■	■	■	■		■	■
9.5	275	3483	■	■	■	■	■	■	■	■
10	275	3483	■	■	■	■	■		■	■
11	250	3167	■	■	■	■	■	■	■	■
11.5	225	2850	■	■	■	■	■		■	■
12	225	2850	■	■	■	■	■	■	■	■
13	215	2724	■	■	■	■	■		■	■
13.5	200	2533	■	■	■	■	■	■	■	
14	200	2533	■	■	■	■	■		■	■
14.5	200	2533	■	■	■	■	■	■	■	■
15	175	2217	■	■	■	■	■		■	■
15.5	175	2217	■	■	■	■	■		■	■
16	175	2217	■	■	■	■	■	■	■	■
17	150	1900	■	■	■	■	■	■	■	■
18.5	145	1837	■	■	■	■	■		■	■
19	125	1583	■	■	■	■	■	■	■	■
19.5	125	1583	■	■	■	■	■			
20	125	1583	■	■	■	■	■	■	■	

Available with pre-inserted connectors for bending equipment on request.