


LPX .008 Stainless Steel Air Spacer

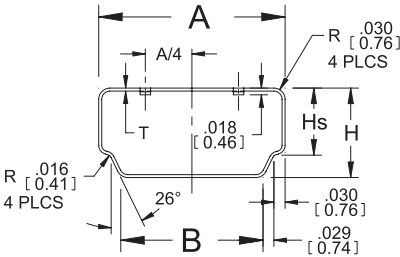


Perforated
(1/4" [6.5mm] and wider)

Tolerance: All dimensions $\pm .005$ [.13mm] unless otherwise specified

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20 mm] Stainless Steel	.240	6.10	.180	4.57	.008	.20

Notes:

1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Material tolerances can be found on Material Specifications Data page (ii).
3. Thermal properties can be found on Thermal Performance Data page (iii).
4. Perforations Only. No Serration.




LPX-SS

LPX .008 Stainless Steel Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
3/16	.188	.068
7/32	.219	.099
1/4	.250	.130
9/32	.281	.161
5/16	.313	.193
21/64	.328	.209
11/32	.344	.224
3/8	.375	.255
13/32	.406	.286
7/16	.438	.318
15/32	.469	.349
1/2	.500	.380
17/32	.531	.411
9/16	.563	.443
19/32	.594	.474
5/8	.625	.505
21/32	.656	.536
11/16	.688	.568
23/32	.719	.599
3/4	.750	.630
13/16	.813	.693


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
5	.197	.077
5.5	.217	.097
6	.236	.116
6.5	.256	.137
7.5	.295	.175
8	.315	.195
8.5	.335	.216
8.9	.350	.231
9	.354	.234
9.5	.374	.254
10	.394	.274
10.5	.413	.294
11	.433	.313
11.5	.453	.333
12	.472	.352
12.5	.492	.373
12.7	.500	.381
13.5	.531	.411
14	.551	.431
14.5	.571	.451
15	.591	.471
15.4	.606	.487
15.5	.610	.490
17.5	.689	.569
18.4	.724	.605
18.5	.728	.608
19	.748	.628




LPX-SS




LPX .008 Stainless Steel Air Spacer Key Availability




A-LPD Fixed




B-LPD Folding




C-LPD WA




D-LPD BI




E-LPD Flex



F-LPD Straight Connector



G-LPD Straight Connector PD




H-LPX Kronenberg Connector



LPX .008 Stainless Steel Air Spacer

Air Spacer Width Fractional	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths		A	B	C	D	E	F	G	H
3/16	500	6333	■	■	■	■	■	■	■	■
7/32	500	6333	■	■	■	■	■	■	■	■
1/4	400	5067	■	■	■	■	■	■	■	■
9/32	375	4750	■	■	■	■	■	■	■	■
5/16	350	4433	■	■	■	■	■	■	■	■
11/32	300	3800	■	■	■	■	■	■	■	■
3/8	275	3483	■	■	■	■	■	■	■	■
13/32	275	3483	■	■	■	■	■	■	■	■
7/16	250	3167	■	■	■	■	■	■	■	■
15/32	225	2850	■	■	■	■	■	■	■	■
1/2	225	2850	■	■	■	■	■	■	■	■
17/32	200	2533	■	■	■	■	■	■	■	■
9/16	200	2533	■	■	■	■	■	■	■	■
19/32	175	2217	■	■	■	■	■	■	■	■
5/8	175	2217	■	■	■	■	■	■	■	■
21/32	160	2027	■	■	■	■	■	■	■	■
11/16	150	1900	■	■	■	■	■	■	■	■
23/32	145	1837	■	■	■	■	■	■	■	■
3/4	140	1733	■	■	■	■	■	■	■	■

**Note: LPX Spacer uses LPD Straight Connectors
and LPX Kronenberg Connectors.**
Available with pre-inserted connectors for bending equipment on request.



LPX-SS



LPX .008 Stainless Steel Air Spacer

Air Spacer Width Millimeter	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability							
	12'8" Lengths		A	B	C	D	E	F	G	H
5.5	475	6016	■	■	■	■	■		■	■
6	400	5067	■	■	■	■	■		■	■
6.5	400	5067	■	■	■	■	■	■	■	■
7.5	350	4433	■	■	■	■	■		■	■
8	350	4433	■	■	■	■	■	■	■	■
9	300	3800	■	■	■	■	■		■	■
9.5	275	3483	■	■	■	■	■	■	■	■
10	275	3483	■	■	■	■	■		■	■
10.5	250	3167	■	■	■	■	■		■	■
11	250	3167	■	■	■	■	■	■	■	■
11.5	225	2850	■	■	■	■	■		■	■
12	225	2850	■	■	■	■	■	■	■	■
12.5	225	2850	■	■	■	■	■		■	■
13.5	200	2533	■	■	■	■	■	■	■	■
14	200	2533	■	■	■	■	■		■	■
14.5	200	2533	■	■	■	■	■	■	■	■
15	175	2217	■	■	■	■	■		■	■
15.5	175	2217	■	■	■	■	■		■	■
16	175	2217	■	■	■	■	■	■	■	■
17.5	150	1900	■	■	■	■	■	■	■	■
18.5	140	1773	■	■	■	■	■		■	■
19	125	1583	■	■	■	■	■	■	■	■

Note: LPX Spacer uses LPD Straight Connectors.

Available with pre-inserted connectors for bending equipment on request.