


Standard Stainless Steel Air Spacer

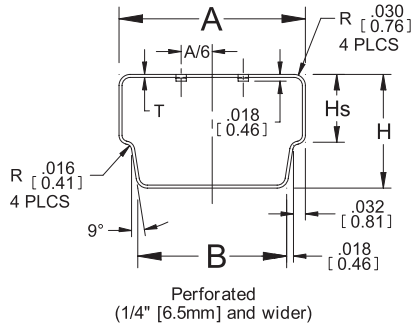


Tolerance: All dimensions $\pm .005$ [.13 mm] unless otherwise specified

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20 mm] Stainless Steel	.305	7.75	.185	4.70	.008	.20

Notes:


1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Material tolerances can be found on Material Specifications Data page (ii).
3. Thermal properties can be found on Thermal Performance Data page (iii).
4. Perforations Only. No Serration.




Standard Stainless Steel Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
3/16	.188	.088
7/32	.219	.119
1/4	.250	.150
17/64	.266	.166
9/32	.281	.181
19/64	.297	.197
5/16	.313	.213
11/32	.344	.244
23/64	.359	.259
3/8	.375	.275
13/32	.406	.306
7/16	.438	.338
15/32	.469	.369
1/2	.500	.400
17/32	.531	.431
9/16	.563	.463
19/32	.594	.494
5/8	.625	.525
21/32	.656	.556
11/16	.688	.588
23/32	.719	.619
3/4	.750	.650
25/32	.781	.681
13/16	.813	.713
27/32	.844	.744
7/8	.875	.775


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
5.5	.217	.117
6	.236	.136
7	.276	.176
7.5	.295	.195
8	.315	.215
9	.354	.254
10	.394	.294
11	.433	.333
11.5	.453	.353
12	.472	.372
13	.512	.412
13.2	.520	.420
14	.551	.451
15	.591	.491
15.5	.610	.510
16	.630	.530
17	.669	.569
17.5	.689	.589
18	.709	.609
18.5	.728	.628
19	.748	.648
20	.787	.687
22	.866	.766




Standard Stainless Steel Air Spacer Key Availability




A-Standard Fixed w/ Hook




B-Standard Fixed w/ Fin




C-Standard Folding




D-Standard Ultra-Loc WA




E-Standard Ultra-Loc BI




F-MP Flex w/ Hook




G-MP Flex w/ Fin




H-MP Straight Connector



I-MP Straight Connector PD




J-Standard Kronenberg Connector



Standard Stainless Steel Air Spacer

Air Spacer Width Fractional	Pieces Per Shipping Carton 12'8" Lengths	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability									
			A	B	C	D	E	F	G	H	I	J
3/16	500	6333	■	■	■	■	■	■	■	■	■	■
7/32	400	5067	■	■	■	■	■	■	■	■	■	■
1/4	350	4333	■	■	■	■	■	■	■	■	■	■
17/64	325	4117	■	■	■	■	■	■	■	■	■	■
9/32	300	3800	■	■	■	■	■	■	■	■	■	■
19/64	250	3167	■	■	■	■	■	■	■	■	■	■
5/16	250	3167	■	■	■	■	■	■	■	■	■	■
11/32	250	3167	■	■	■	■	■	■	■	■	■	■
23/64	225	2850	■	■	■	■	■	■	■	■	■	■
3/8	200	2533	■	■	■	■	■	■	■	■	■	■
13/32	200	2533	■	■	■	■	■	■	■	■	■	■
7/16	175	2217	■	■	■	■	■	■	■	■	■	■
15/32	175	2217	■	■	■	■	■	■	■	■	■	■
1/2	175	2217	■	■	■	■	■	■	■	■	■	■
17/32	160	2027	■	■	■	■	■	■	■	■	■	■
9/16	150	1900	■	■	■	■	■	■	■	■	■	■
19/32	140	1773	■	■	■	■	■	■	■	■	■	■
5/8	130	1647	■	■	■	■	■	■	■	■	■	■
21/32	130	1647	■	■	■	■	■	■	■	■	■	■
11/16	120	1520	■	■	■	■	■	■	■	■	■	■
23/32	110	1393	■	■	■	■	■	■	■	■	■	■
3/4	100	1267	■	■	■	■	■	■	■	■	■	■
25/32	100	1267	■	■	■	■	■	■	■	■	■	■
13/16	100	1267	■	■	■	■	■	■	■	■	■	■
27/32	100	1267	■	■	■	■	■	■	■	■	■	■
7/8	75	950	■	■	■	■	■	■	■	■	■	■
			■	■	■	■	■	■	■	■	■	■

Available with pre-inserted connectors for bending equipment on request.



STD-SS



Standard Stainless Steel Air Spacer

Air Spacer Width Millimeter	Pieces Per Shipping Carton	Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability									
	12'8" Lengths		A	B	C	D	E	F	G	H	I	J
5.5	400	5067	■	■	■	■	■		■	■	■	
6	350	4433	■	■	■	■	■		■	■	■	
7	250	3167	■	■	■	■	■		■	■	■	
7.5	250	3167		■	■	■	■		■	■	■	
8	250	3167	■	■	■	■	■	■	■	■	■	
9	250	3167	■	■	■	■	■		■	■	■	
10	190	2407		■	■	■	■		■			
11	175	2217	■	■	■	■	■	■	■	■	■	
11.5	175	2217		■	■	■	■		■			
12	175	2217	■	■	■	■	■		■	■	■	
13	170	2153	■	■	■	■	■	■	■	■	■	
13.2	165	2090										
14	150	1900	■	■	■	■	■	■	■	■	■	
15	140	1773		■	■	■	■		■	■	■	
15.5	130	1647	■	■	■	■	■		■	■	■	■
16	130	1647	■	■	■	■	■	■	■	■	■	
17	130	1647		■	■	■	■		■			
18	120	1520		■		■	■		■			
18.5	120	1520	■	■	■	■	■		■		■	
19	100	1267	■	■	■	■	■	■	■	■	■	
20	100	1267	■	■	■	■	■		■		■	
22	75	950	■	■		■	■				■	

Available with pre-inserted connectors for bending equipment on request.