
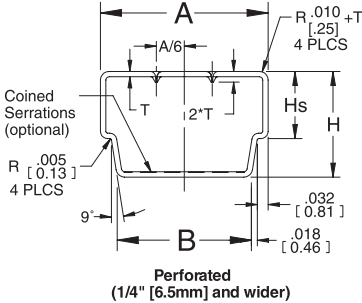


STD

ALLMETAL®

Standard Air Spacer

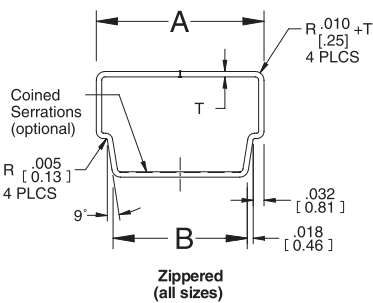


Tolerance: All dimensions .005 [.13 mm] unless otherwise specified.

Material	H		Hs		T	
	IN	MM	IN	MM	IN	MM
.008" [.20mm] Hi-Q Steel	.305	7.75	.185	4.70	.008	.20
.010" [.25mm] Anodized Aluminum	.308	7.82	.188	4.78	.010	.25
.012" [.30mm] Hi-Q Steel	.310	7.87	.190	4.83	.012	.30
.014" [.36mm] Anodized Aluminum	.311	7.90	.191	4.85	.014	.36
.015" [.38mm] Black Steel	.315	8.00	.195	4.95	.015	.38
.016" [.41mm] Anodized Aluminum	.315	8.00	.195	4.95	.016	.41
.016" [.41mm] Mill Finish Aluminum	.316	8.03	.196	4.98	.016	.41
.020" [.47mm] Anodized Aluminum	.320	8.13	.200	5.08	.0185	.47

Notes:

1. Dimensions are in decimal inches; dimensions in [] brackets are in mm.
2. Available with serrations at no extra charge on inside of **Aluminum** spacer at location indicated above; **not** recommended for spacer to be used for bending.
3. 5/32 size currently available in Black Steel only.
4. Material tolerances can be found on Material Specifications Data page (ii).
5. Thermal properties can be found on Thermal Performance Data page (iii).




STD


Standard Air Spacer Specifications

Air Spacer Width Fractional	Decimal Equivalent	
	A	B
5/32	.156	.096
3/16	.188	.088
7/32	.219	.119
1/4	.250	.150
17/64	.266	.166
9/32	.281	.181
19/64	.297	.197
5/16	.313	.213
11/32	.344	.244
23/64	.359	.259
3/8	.375	.275
13/32	.406	.306
7/16	.438	.338
15/32	.469	.369
1/2	.500	.400
17/32	.531	.431
9/16	.563	.463
19/32	.594	.494
5/8	.625	.525
21/32	.656	.556
11/16	.688	.588
23/32	.719	.619
3/4	.750	.650
25/32	.781	.681
13/16	.813	.713
27/32	.844	.744
7/8	.875	.775


Air Spacer Width Millimeter	Decimal Equivalent	
	A	B
5	.197	.097
5.5	.217	.117
6	.236	.136
7	.276	.176
7.5	.295	.195
8	.315	.215
9	.354	.254
10	.394	.294
11	.433	.333
11.5	.453	.353
12	.472	.372
13	.512	.412
13.2	.520	.420
14	.551	.451
15	.591	.491
15.5	.610	.510
16	.630	.530
17	.669	.569
17.5	.689	.589
18	.709	.609
18.5	.728	.628
19	.748	.648
20	.787	.687
22	.866	.766




Standard Air Spacer Key Availability




A-Standard Fixed w/ Hook




B-Standard Fixed w/ Fin




C-Standard Folding




D-Standard Ultra-Loc WA




E-Standard Ultra-Loc BI




F-MP Flex w/ Hook




G-MP Flex w/ Fin




H-MP Straight Connector



I-MP Straight Connector PD



J-Kronenberg Connector




Standard Air Spacer

Aluminum: Clear Anodized, Color In™ Anodized & Mill Finish

Air Spacer Width Fractional	Pieces Per Shipping Carton		Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability									
	12'8" Lengths	Cut To Length		A	B	C	D	E	F	G	H	I	J
5/32	500	TBA	6333		■								
3/16	500	500	6333	■	■	■	■	■	■	■	■	■	
7/32	400	400	5067	■	■	■	■	■	■	■	■	■	
1/4	350	1000	4333	■	■	■	■	■	■	■	■	■	
17/64	325	950	4117	■	■	■	■	■	■	■	■	■	
9/32	300	900	3800	■	■	■	■	■	■	■	■	■	
19/64	250	800	3167		■	■	■	■	■	■	■	■	
5/16	250	800	3167	■	■	■	■	■	■	■	■	■	
11/32	250	700	3167	■	■	■	■	■	■	■	■	■	
23/64	225	700	2850	■	■	■	■	■	■	■	■	■	
3/8	200	650	2533	■	■	■	■	■	■	■	■	■	
13/32	200	600	2533	■	■	■	■	■	■	■	■	■	
7/16	175	500	2217	■	■	■	■	■	■	■	■	■	
15/32	175	500	2217	■	■	■	■	■	■	■	■	■	
1/2	175	500	2217	■	■	■	■	■	■	■	■	■	■
17/32	160	450	2027	■	■	■	■	■	■	■	■	■	
9/16	150	400	1900	■	■	■	■	■	■	■	■	■	
19/32	140	375	1773	■	■	■	■	■	■	■	■	■	
5/8	130	350	1647	■	■	■	■	■	■	■	■	■	
21/32	130	350	1647	■	■	■	■	■	■	■	■	■	
11/16	120	325	1520	■	■	■	■	■	■	■	■	■	
23/32	110	300	1393	■	■	■	■	■	■	■	■	■	
3/4	100	300	1267	■	■	■	■	■	■	■	■	■	
25/32	100	TBA	1267	■	■	■	■	■	■	■	■	■	
13/16	100	300	1267	■	■		■	■	■	■	■	■	
27/32	100	TBA	1267		■		■	■					
7/8	75	275	950	■	■		■	■				■	■

Available with pre-inserted connectors for bending equipment on request.



STD



Standard Air Spacer

Aluminum: Clear Anodized, Color In™ Anodized & Mill Finish

Air Spacer Width Millimeter	Pieces Per Shipping Carton		Lineal Feet Per Shipping Carton 12'8" Lengths	Key Availability									
	12'8" Lengths	Cut To Length		A	B	C	D	E	F	G	H	I	J
5	450	450	5700	■	■	■	■	■	■	■	■	■	
5.5	400	400	5067	■	■	■	■	■		■	■	■	
6	350	1000	4433	■	■	■	■	■		■	■	■	
7	250	800	3167	■	■	■	■	■		■	■	■	
7.5	250	800	3167		■	■	■	■		■	■	■	
8	250	800	3167	■	■	■	■	■	■	■	■	■	
9	250	700	3167	■	■	■	■	■		■	■	■	
10	190	600	2407		■	■	■	■		■			
11	175	500	2217	■	■	■	■	■	■	■	■	■	
11.5	175	500	2217		■	■	■	■		■			
12	175	500	2217	■	■	■	■	■		■	■	■	
13	170	450	2153	■	■	■	■	■		■	■	■	
13.2	165	425	2090										■
14	150	400	1900	■	■	■	■	■	■	■	■	■	
15	140	375	1773		■	■	■	■	■	■	■	■	
15.5	130	350	1647	■	■	■	■	■		■	■	■	■
16	130	350	1647	■	■	■	■	■	■	■	■	■	
17	130	350	1647		■	■	■	■		■			
18	120	300	1520		■		■	■		■			
18.5	120	300	1520	■	■	■	■	■		■		■	
19	100	300	1267	■	■	■	■	■	■	■	■	■	
20	100	300	1267	■	■	■	■	■		■		■	
22	75	275	950	■	■		■	■					■

Available with pre-inserted connectors for bending equipment on request.